


REV.	DESCRIPTION	DATE
A		
B		02-2006

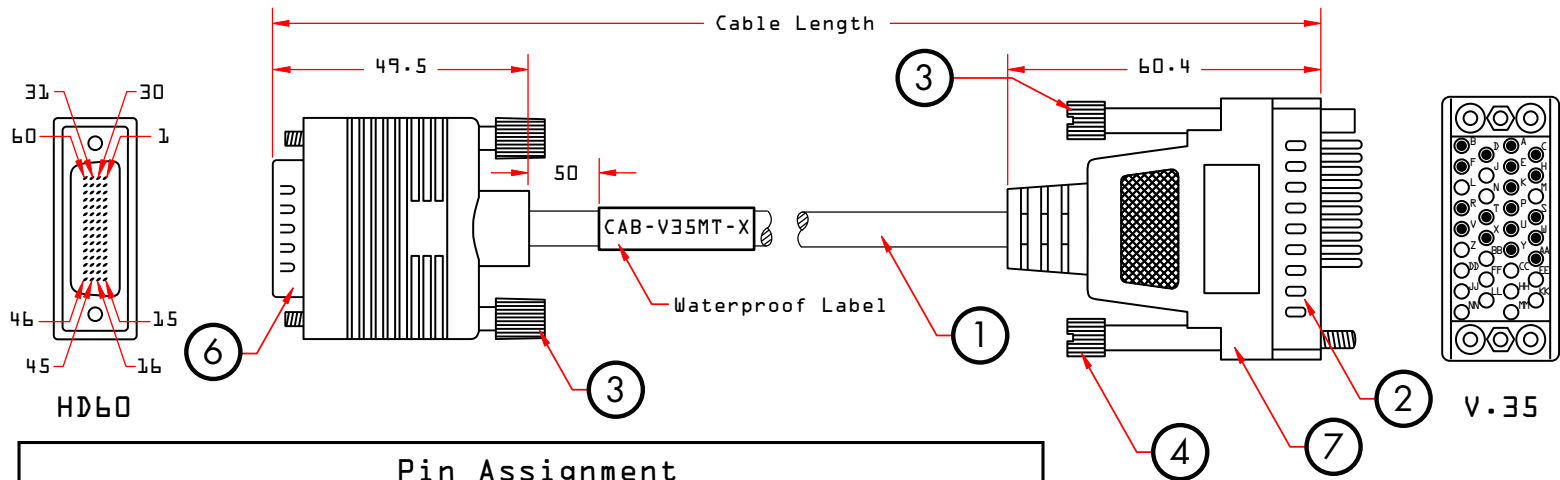

Pin Assignment					
HD60 Male	V.35 Male	HD60 Male	V.35 Male	HD60 Male	V.35 Male
42	C	18	P	48	Shorting Group
45	B	17	S	49	
35	D	28	R	50	Shorting Group
45	B	27	T	51	
34	E	20	U	52	Shorting Group
45	B	19	W	53	
33	F	26	V	54	Shorting Group
45	B	25	X	55	
43	H	24	Y	56	A
45	B	23	AA	46	
44	K			Shell	Shell
45	B				

PART NO.	CABLE LENGTH
10C0-04106	10 ft
10C0-04110	15 ft

7	Molded PVC BL17/8DP
6	M0L60 Male, Gold Flash on Contacts, Black Insulator
5	Screw 4.5 x 55.2mm, Female
4	Screw 4.5 x 55.2mm, Male
3	Molded Thumb Screws #4-40, BL17/8DP
2	v.35 Male, Gold Flash on Contacts, Black Insulator
1	UL2919 11 Twisted Pairs 28AWG, AL-Mylar & Copper Braid Foil Shielding with Drain Wire, OD: 6.5mm, Jacket BL17/8DP
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10C0-041xx		DRAWER	MPD
TITLE	HD60 Male to V.35 Male, CISCO Cable		CHECKED	MAC
MATERIAL		SCALE	APPROVED	MAC
REV.	A	UNIT	INCH	
DRAWING NO:				

