


REV.	DESCRIPTION	DATE
A		
B		02-2006

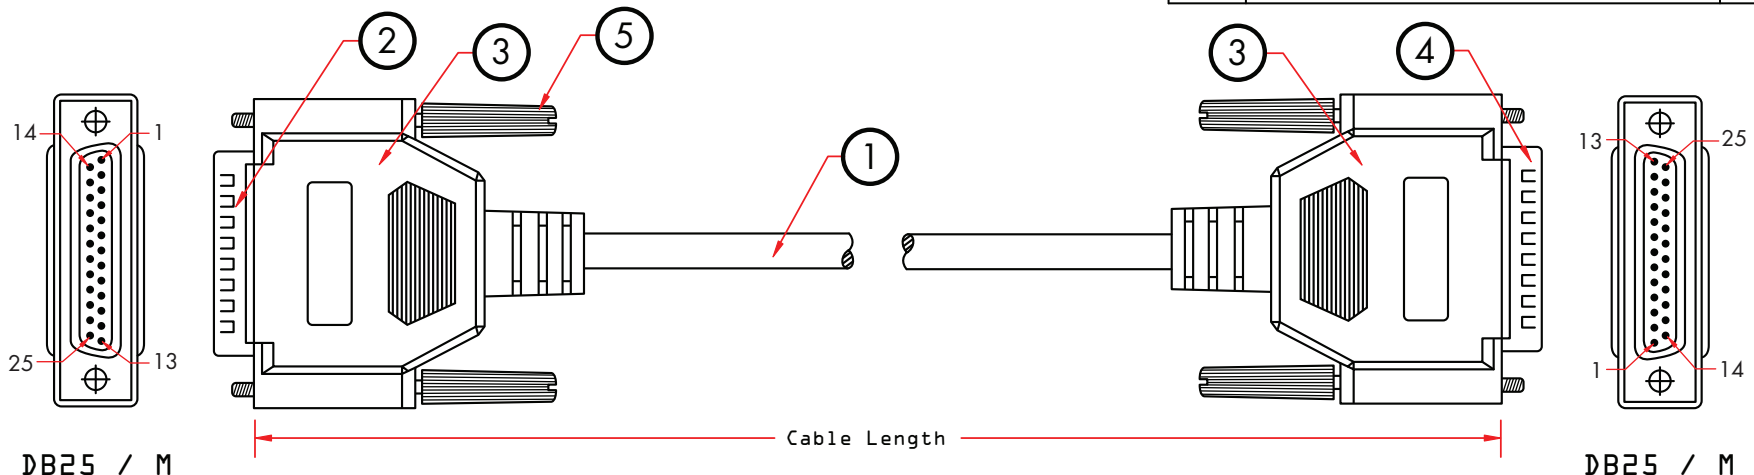

DB25 / M


DB25 / M

Pin Assignment

DB25 Male	DB25 Male	DB25 Male	DB25 Male
1	1	14	14
2	2	15	15
3	3	16	16
4	4	17	17
5	5	18	18
6	6	19	19
7	7	20	20
8	8	21	21
9	9	22	22
10	10	23	23
11	11	24	24
12	12	25	25
13	13	6	6

RoHS
Compliant

PART NO.	CABLE LENGTH
10D3-01103	3 ft
10D3-01106	6 ft
10D3-01110	10 ft
10D3-01115	15 ft
10D3-01125	25 ft
10D3-01150	50 ft
10D3-011HD	100 ft

SPECIFICATIONS		ITEM NUMBER	10D3-011xx		DRAWER	MPD
5	4-40 Molded Thumb Screw, Beige	TITLE	DB25 Male / DB25 Male, 1:1 Serial Cable		CHECKED	MAC
4	DB25 Male W/Gold Plating Contacts	MATERIAL	SCALE		APPROVED	MAC
3	Beige Molded PVC Hood, Fully Shielded w/AL-Foil	REV.	A	UNIT	INCH	
2	DB25 Male W/Gold Plating Contacts	DRAWING NO:				
1	25C (28AWG/7*0.12) + Drain (26AWG/7*0.16) Wire, Single Shield w/AL-Foil, Beige Outer PVC Jacket UL2464 Equivalent					
NO.	BOM LIST					