


REV.	DESCRIPTION	DATE
A		
B		02-2006

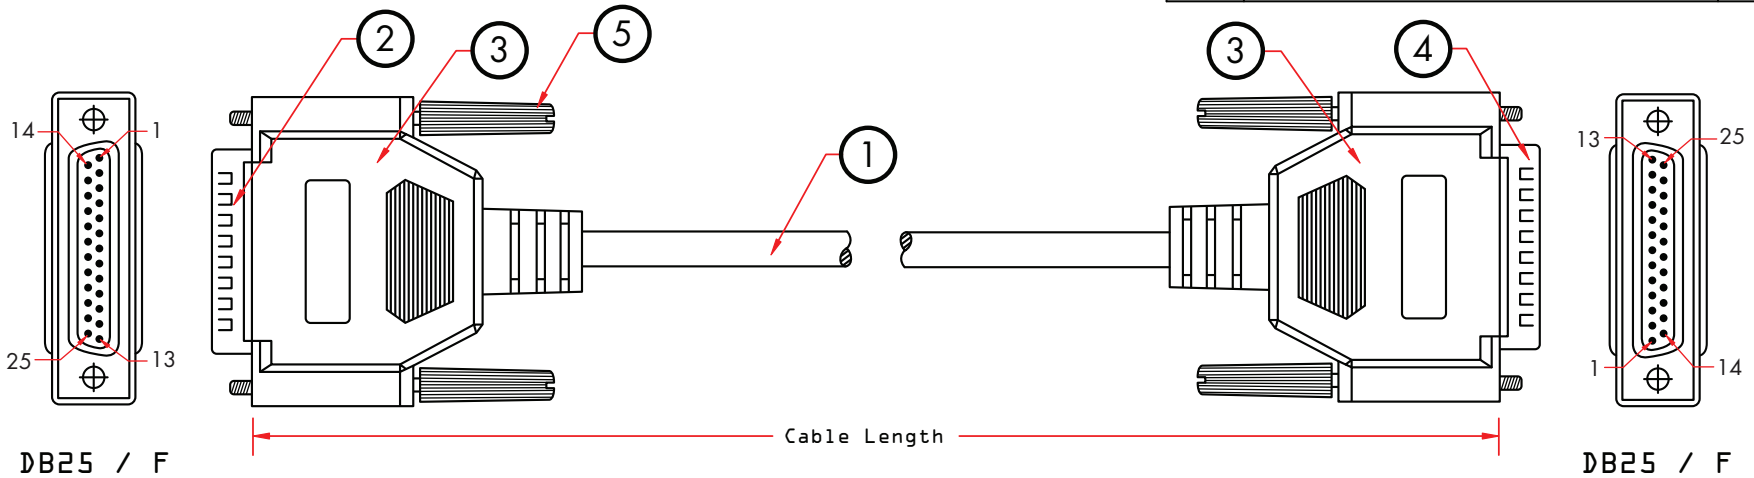

**Pin Assignment**

DB25 Female	DB25 Female	DB25 Female	DB25 Female
1	1	14	14
2	2	15	15
3	3	16	16
4	4	17	17
5	5	18	18
6	6	19	19
7	7	20	20
8	8	21	21
9	9	22	22
10	10	23	23
11	11	24	24
12	12	25	25
13	13	6	6

RoHS  
Compliant

PART NO.	CABLE LENGTH
10D3-01406	6 ft
10D3-01410	10 ft
10D3-01415	15 ft
10D3-01425	25 ft
10D3-01450	50 ft

ITEM NUMBER		10D3-014xx		DRAWER	MPD
5	4-40 Molded Thumb Screw, Beige	TITLE		CHECKED	MAC
4	DB25 Female w/Gold Plating Contacts				
3	Beige Molded PVC Hood, Fully Shielded w/AL-Foil	MATERIAL		APPROVED	MAC
2	DB25 Female w/Gold Plating Contacts				
1	25C (28AWG/7*0.12) + Drain (26AWG/7*0.16) Wire, Single Shield w/AL-Foil, Beige Outer PVC Jacket UL2464 Equivalent	SCALE		INCH	
NO.	SPECIFICATIONS	REV.	A		
	BOM LIST	DRAWING NO:			

