


REV.	DESCRIPTION	DATE
A		
B		09-2006

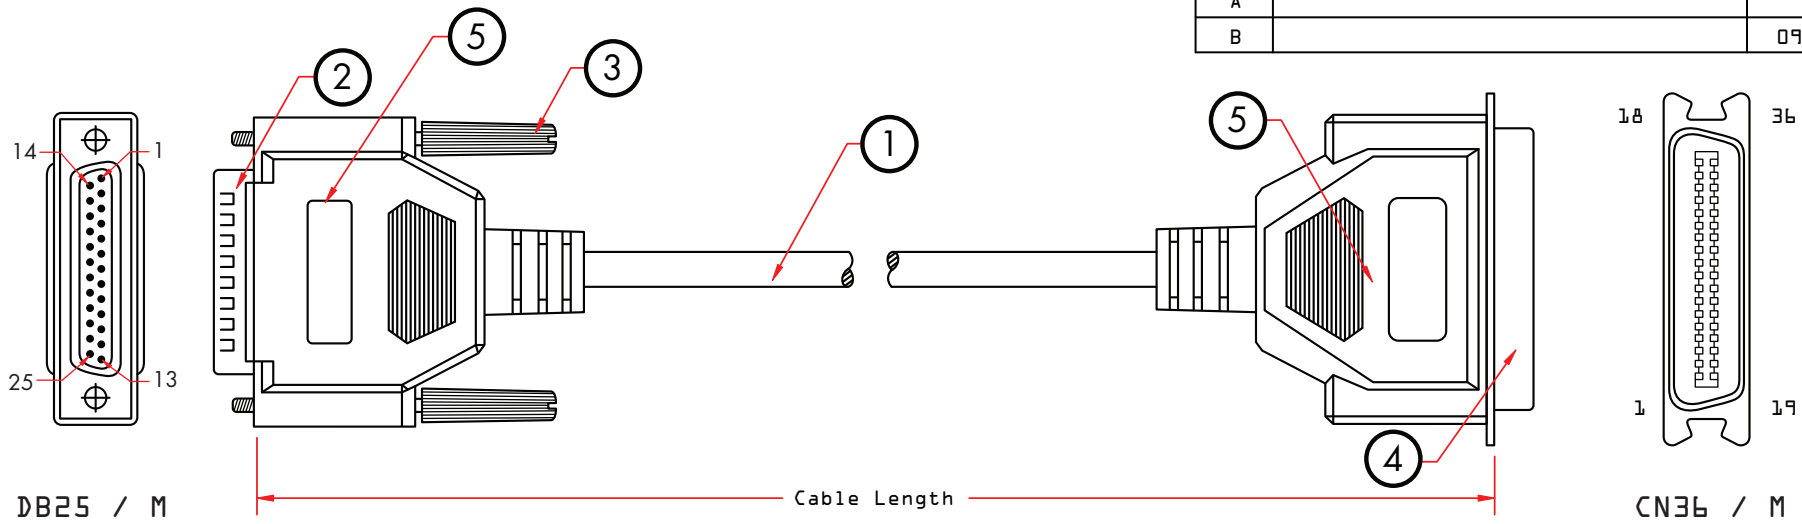

Pin Assignment			
DB25 / M	CN36 / M	DB25 / M	CN36 / M
1	1	10	10
18	19	24	28
2	2	11	11
19	20	23	29
3	3	12	12
	21		17 — NC
4	4	13	13
20	22		15 — NC
5	5	14	14
	23	25	30
6	6	16	31
21	24		33
7	7	15	32
	25		34
8	8	17	36
22	26		35 — NC
9	9		18 — NC
	27		16 — NC

PART NO.	CABLE LENGTH
10E2-01103	3 ft
10E2-01106	6 ft
10E2-01110	10 ft
10E2-01115	15 ft
10E2-01125	25 ft
10E2-01150	50 ft

5	Beige Molded PVD Hood, Fully Shielded w/AL-Foil
4	CN36 Male w/Gold Plating Contacts
3	4/40 Molded Thumbscrew, Beige
2	DB25 Male w/Gold Plating Contacts
1	IEEE-1284 18 Pair (28AWG/7*0.12) + Drain (26AWG/7*0.16) Wire, Double Shield w/AL-Foil, OD: 8.0mm, Beige Outer PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10E2-011xx		DRAWER	MPD
TITLE	DB25 Male / CN36 Male IEEE-1284 Printer Cable		CHECKED	MAC
MATERIAL	SCALE		APPROVED	MAC
REV.	A	UNIT	INCH	
DRAWING NO:				
		 888-212-8295.com		