


REV.	DESCRIPTION	DATE
A		
B		09-2006

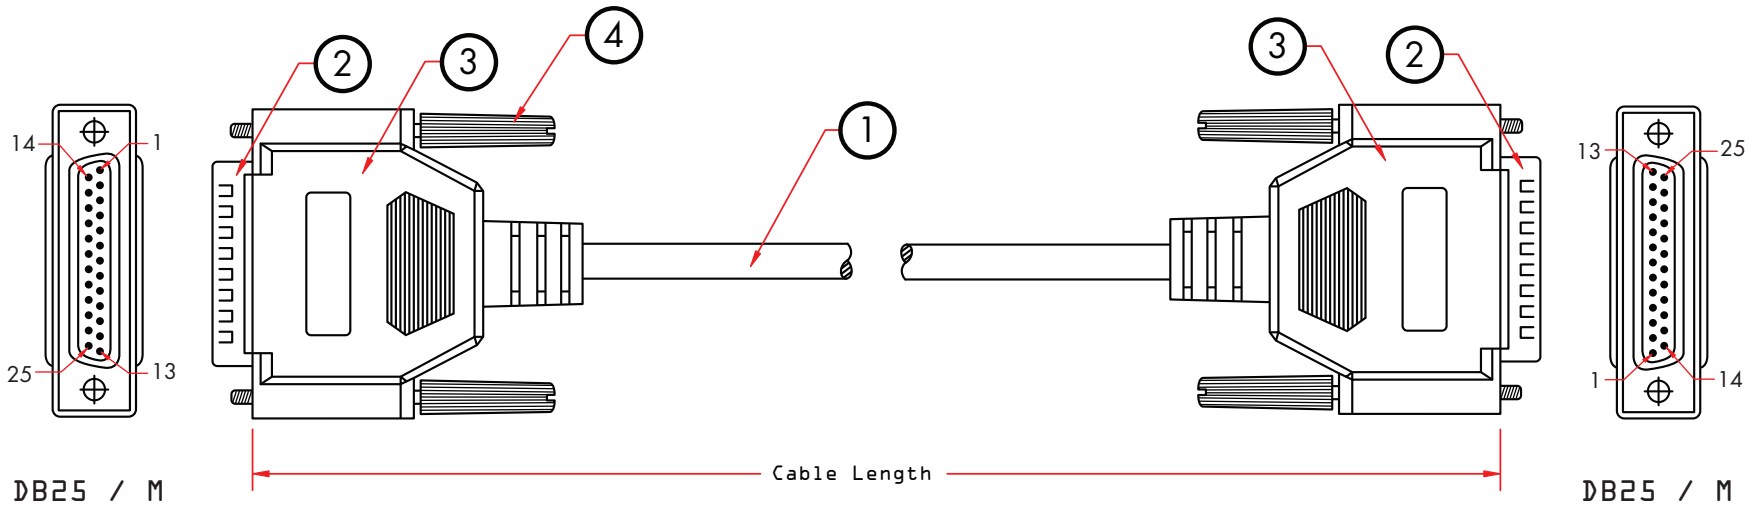


Pin Assignment			
DB25 / M	DB25 / M	DB25 / M	DB25 / M
1	1	10	10
18	18	24	24
2	2	11	11
19	19	23	23
3	3	12	12
4	4	13	13
20	20	14	14
5	5	25	25
6	6	16	16
21	21	15	15
7	7	17	17
8	8		
22	22		
9	9		
		Shield	Shield

PART NO.	CABLE LENGTH
10E2-05106	6 ft
10E2-05110	6 ft
10E2-05115	15 ft
10E2-05125	25 ft

4	4/40 Molded Thumb Screw, Beige
3	Beige Molded PVD Hood, Fully Shielded w/AL-Foil
2	DB25 Male w/Gold Plating Contacts
1	IEEE-1284 18 Pair (28AWG/7*0.12) + Drain (26AWG/7*0.16) Wire, Double Shield w/AL-Foil, OD: 8.0mm, Beige Outer PVC Jacket
NO.	SPECIFICATIONS

ITEM NUMBER	10E2-051xx	DRAWER	MPD
TITLE	DB25 Male / DB25 Male IEEE-1284 Printer Cable	CHECKED	MAC
MATERIAL		APPROVED	MAC
REV.	A	SCALE	INCH
DRAWING NO:			



BOM LIST