

REV.	DESCRIPTION	DATE
A		
B		03-2008


Product Specification \_\_\_\_\_

Construction & Material

Part Number	Color
10F4-0471TH	Red

Item	Specification
Product	FPLR, Fire Alarm / Security
Conductor	Construction
	Solid 4x22AWG
Material	Bare Copper
	PVC
Insulation	Min. thickness
	0.254 mm
	Avg. thickness
	1.143 mm
	Diameter
114 mm	
Nom. Lay Length	Black, Red, White, Green
Color	PVC
Jacket	Material
	Min. thickness
	0.508 mm
	Avg. thickness
3.937 mm	
Diameter	Red
Color	20 lbs./Kft
Approximate Cable Weight	

Cross Section: \_\_\_\_\_

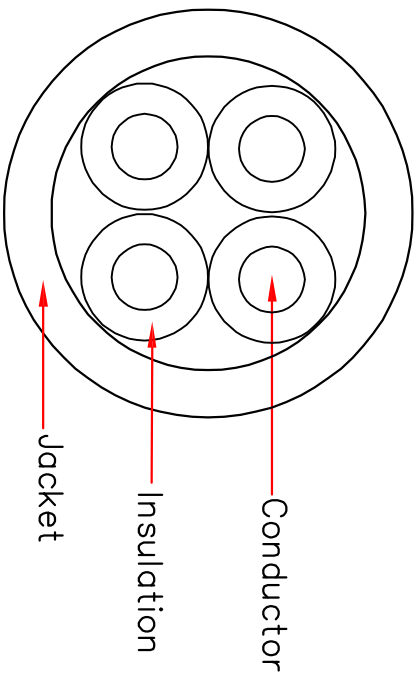

Electrical Properties:		DRAWER	LIBRA
Nom. DC Resistance per Conductor@20°C	6.43 Ohms/Kft.nom.	CHECKED	
Capacitance Between Conductors@KHz	30 pF/ft.nom.	APPROVED	
Operating Voltage	300 V/RMS max.		
Temperature Rating	-20 °C to 60 °C		

PART NUMBER:	TITLE:
10F4-0471TH	4/22 Solid FPLR Pullbox, 1000 ft

