


REV.	DESCRIPTION	DATE
A		
B		10-2006

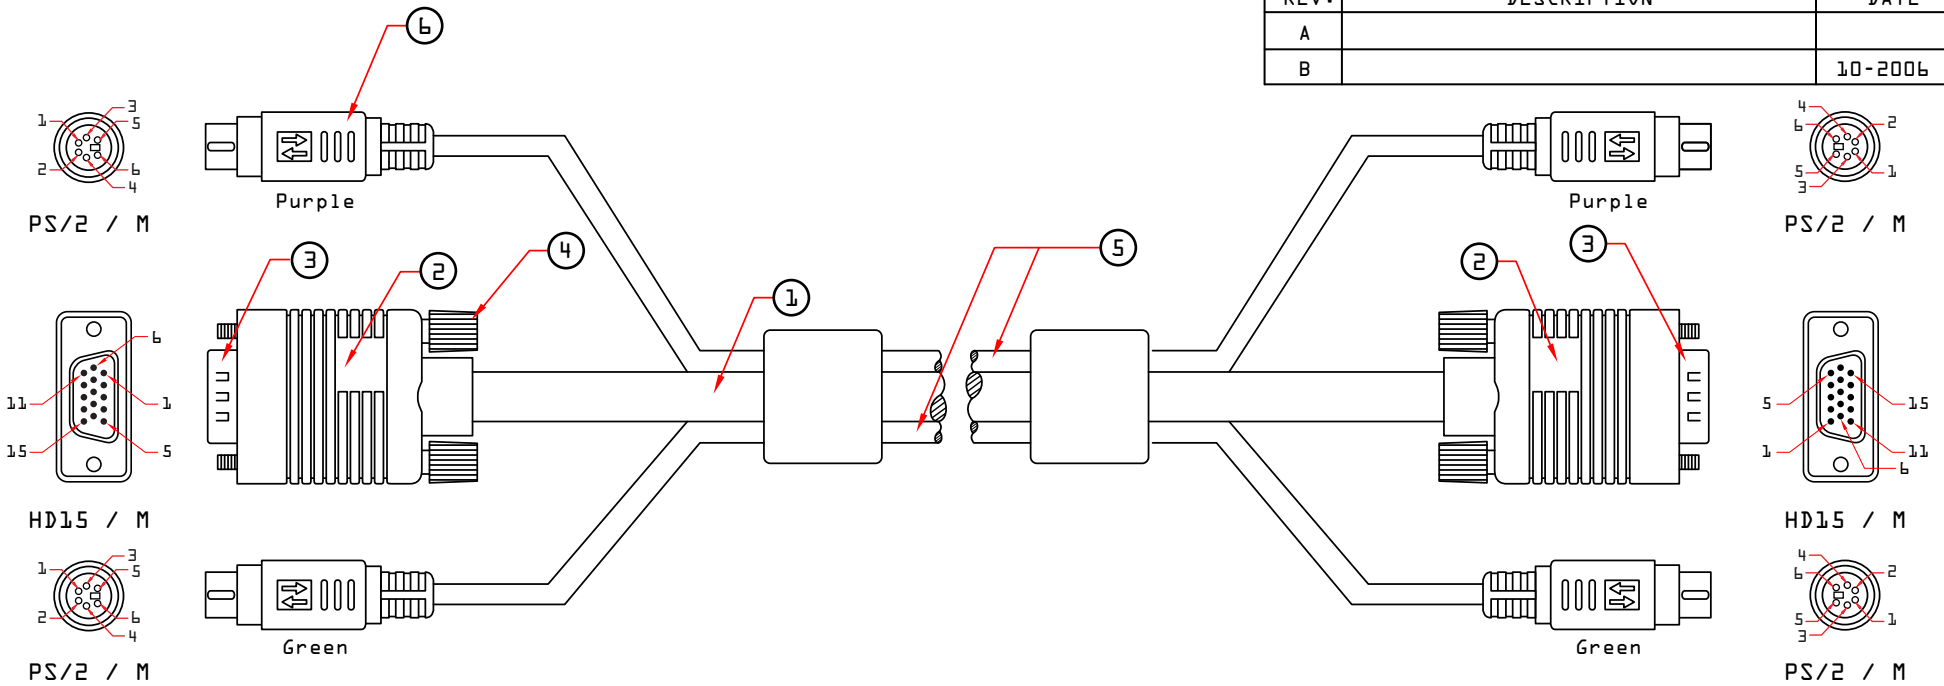

PIN ASSIGNMENT					PIN ASSIGNMENT	
HD15 Male	HD15 Male	HD15 Male	HD15 Male	PS/2 Male	PS/2 Male	
1	1 Red Coax	9	9 Yellow	1	1	
6	6 Red Coax Shield	5	5 Red	2	2	
2	2 Green Coax	12	12 Red / White	3	3	
7	7 Green Coax Shield	10	10 Orange	4	4	
3	3 Blue Coax	13	13 Orange / White	5	5	
8	8 Blue Coax Shield	11	11 Black	6	6	
4	4 Brown	15	15 Black / White			
14	14 Brown / White	Shell	Shell			

PART NO.	CABLE LENGTH
10H1-30106	6 ft
10H1-30110	10 ft
10H1-30115	15 ft
10H1-30125	25 ft

6	PS/2 (MiniDIN6) Male, w/Gold Flash Contacts, Nickel Plated Shell	ITEM NUMBER	10H1-301xx		DRAWER	MPD
5	6C (28AWG 7*0.12mm) + Drain Wire (26AWG 7*0.16mm), Beige PVC Jacket	TITLE	SVGA (HD15) Male + PS/2 Male / SVGA (HD15) Male + PS/2 Male, KVM Cables		CHECKED	MAC
4	Slotted 4/40 Molded Thumbscrew, Color: Beige	MATERIAL		SCALE	APPROVED	MAC
3	HD15 (SVGA) Male w/Gold Plating Contacts	REV.	A	UNIT		
2	Beige Molded PVC Hood, Fully Shielded w/Al-Foil	DRAWING NO:		INCH		
1	UL2919, 3 Mini-Coaxial (28AWG 7*0.12mm) 4 Twisted Pairs, 1 Conductor + Drain Wire (26AWG 7*0.16mm), w/Al-Foil & Copper Braid, Beige PVC Jacket				 888-212-8295.com	
NO.	SPECIFICATIONS					
	BOM LIST					