


REV.	DESCRIPTION	DATE
A		
B		12-2006

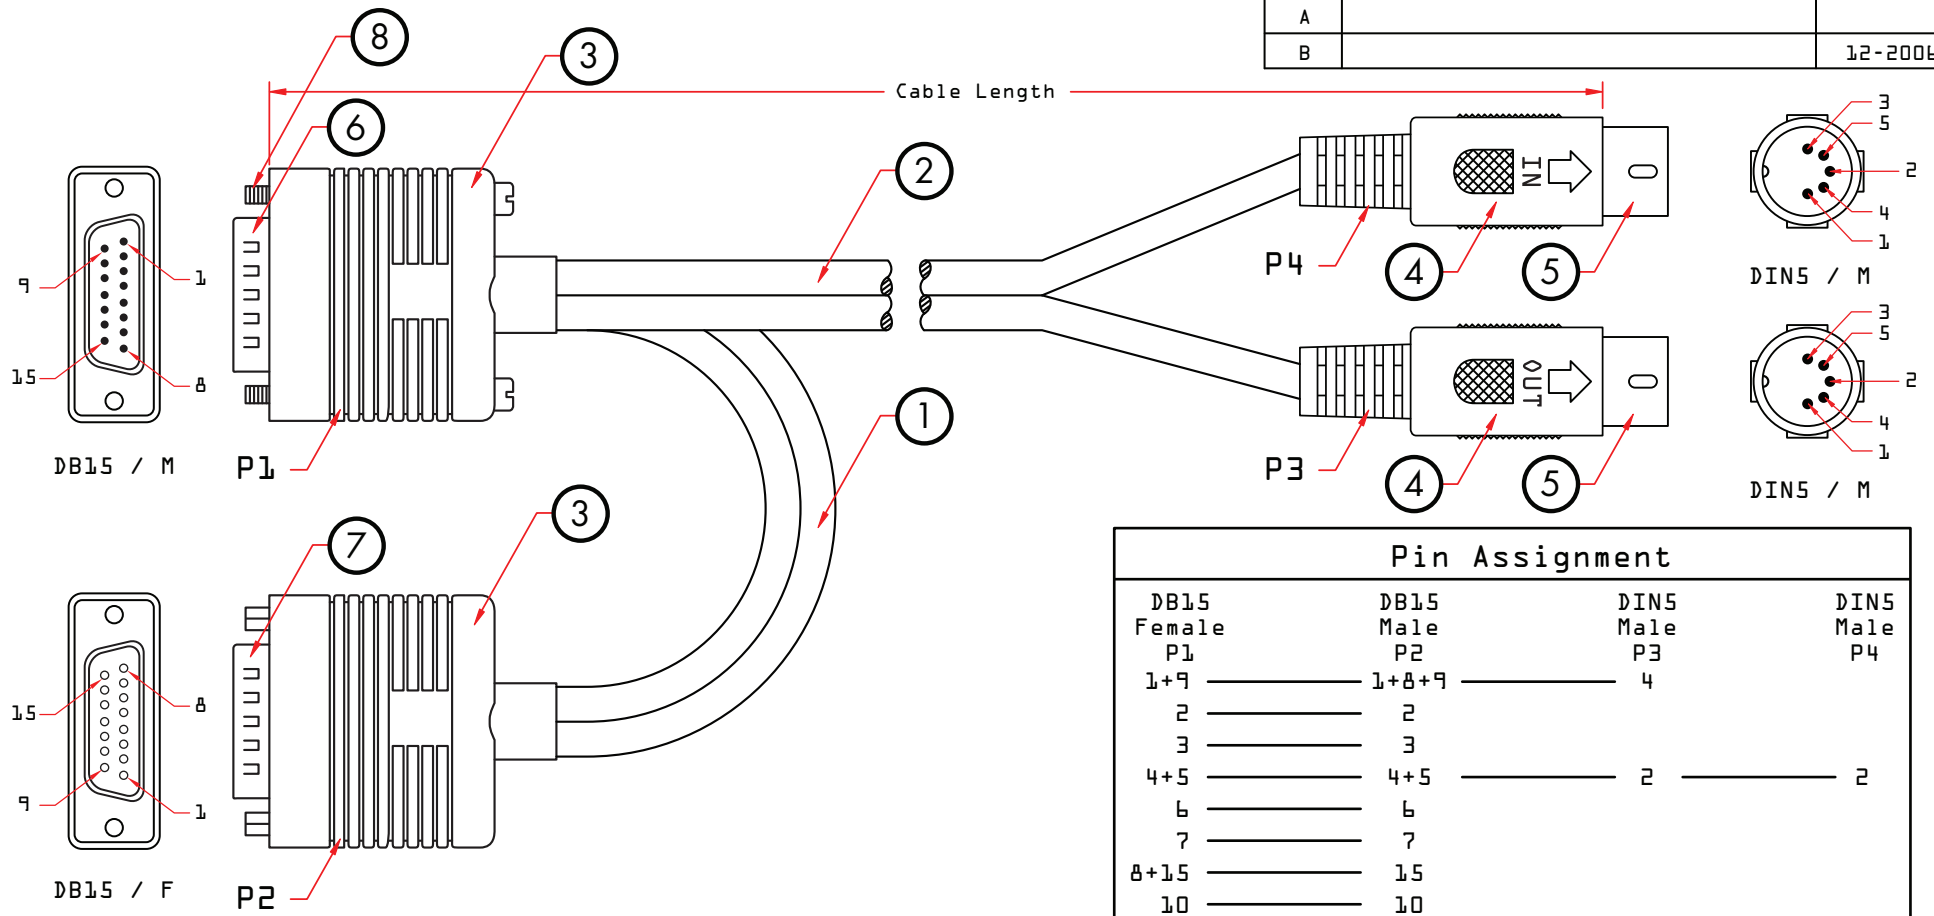

Pin Assignment			
DB15 Female P1	DB15 Male P2	DIN5 Male P3	DIN5 Male P4
1+9	1+8+9	4	
2	2		
3	3		
4+5	4+5	2	2
6	6		
7	7		
8+15	15		
10	10		
11	11		
12	12		
13	13		
14	14		
6	6	G	G

8	4-40 Screw, Length: 12.5mm
7	HD15 (SVGA) Female w/ Gold Plating Contacts, w/ Riveted Hex-Nut
6	HD15 (SVGA) Male w/ Gold Plating Contacts
5	DIN5 Male w/ Gold Plating Contacts
4	Black Molded PVC Hood
3	Black Molded PVC Hood, Fully Shielded w/ Al-Foil
2	2C 28AWG (7*0.12mm) x 2, Al/Mylar Foil Shielded w/ 26AWG Drain Wire (7*0.16mm) Black PVC Jacket
1	6C 28AWG (7*0.12mm) x 2, Al/Mylar Foil Shielded w/ 26AWG Drain Wire (7*0.16mm) Black PVC Jacket
NO.	SPECIFICATIONS

ITEM NUMBER	1015-08804	DRAWER	MPD
TITLE	DB15 Male + Pig Tailed DB15 Female to 2 x DIN5 Male, Midi Audio Cable, 4 ft	CHECKED	MAC
MATERIAL		APPROVED	MAC
REV.	A	SCALE	INCH
DRAWING NO:			

BOM LIST

