



| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | |
| B | | 01-2007 |

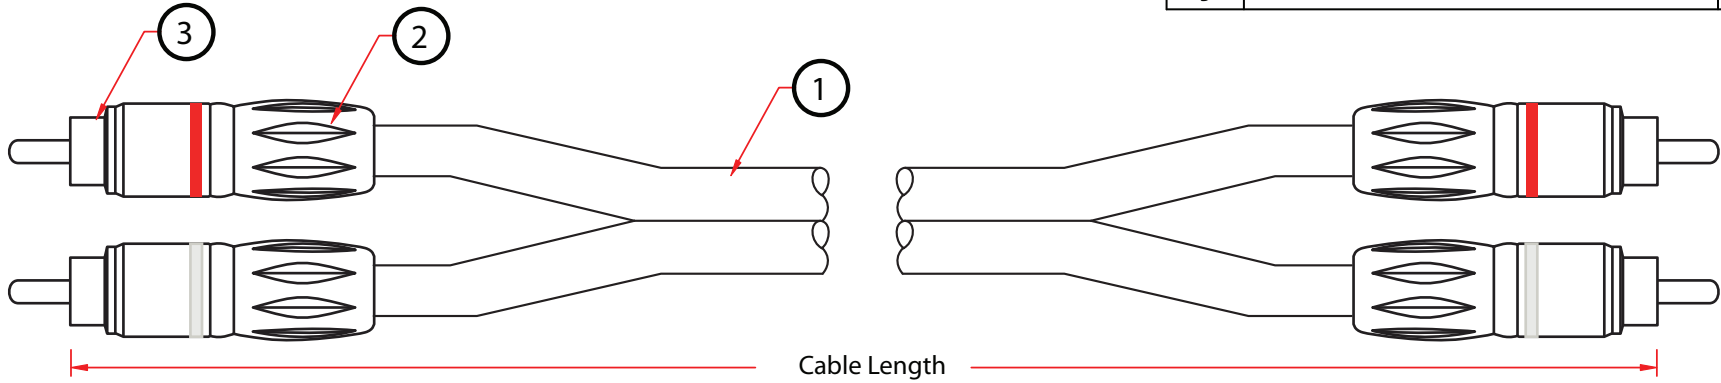

Audio Cable Specifications:

- 1 Conductor: OFC Copper 24AWG(0.12mm*20)
- 2 Core Dielectric: Gas Injected Foam PE
- 3 Shield Braid: OFC Copper (0.12mm/16*4)
- 4 Black PVC Jacket
- 5 Mylar Aluminum Foil

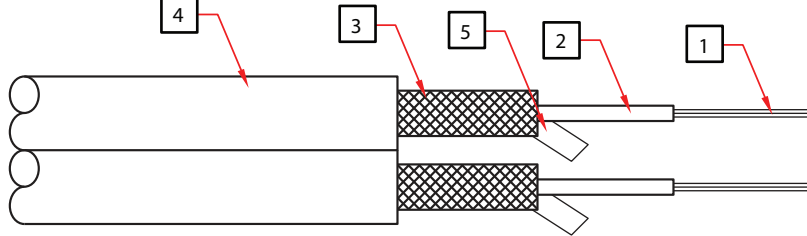


RoHS

| PART NO. | CABLE LENGTH |
|------------|--------------|
| 10R4-02103 | 3 ft |
| 10R4-02106 | 6 ft |
| 10R4-02112 | 12 ft |
| 10R4-02125 | 25 ft |
| 10R4-02135 | 35 ft |
| 10R4-02150 | 50 ft |
| 10R4-02175 | 75 ft |
| 10R4-021HD | 100 ft |

| | |
|-----|--|
| 3 | RCA Male, 24k Gold Plated Connector |
| 2 | 75 Ohm, Metal RCA Shell |
| 1 | CL2 Inwall Rated Stereo Audio, 24AWG(0.12mm*20) w/Al-Foil + Braid, OD: 6.8mm, Black PVC Jacket |
| NO. | SPECIFICATIONS |
| | BOM LIST |

| | | | | |
|-------------|---|-------|----------|-----|
| ITEM NUMBER | 10R4-021xx | | DRAWER | MPD |
| TITLE | 24K Gold Premium Grade Stereo Audio RCA Cable | | CHECKED | MAC |
| | | | APPROVED | MAC |
| MATERIAL | | SCALE | | |
| REV. | A | UNIT | | |
| DRAWING NO: | | | | |



| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | |
| B | | 01-2007 |

| ITEMS | CONDITIONS | SPECIFICATIONS |
|----------------------------------|---|---|
| Appearance | | No defects such as cracks, scratches or blemishes. |
| Insertion force withdrawal force | Measurement shall be made after inserting into its mating plug or socket three times. RCA Plug. | 5.88N(06Kgf) ~ 49.0N(5.0Kgf) |
| Tensile Strength | Between Cable & Connector 49.0N(5.0KGF), 1 Minute | No damage such as displacement or insulation damage, etc |
| Flexing Test | 500G, +/-60 degrees, 1000 Turns 15~20 / Per Min Turns | No damage such as displacement or insulation damage, etc |
| Insulation Resistance | DC 250V 1 minute between conductors | 100 M Ohm or more |
| Dielectric Strength | AC 250V Shall be applied for 1 minute with trip current 2mA between conductors | Without damage such as electric breakdown |
| ABS Non-migration | Temperature: 54 +/-1 C Time: 24 +/-1 H Weight: 500 +/-25 G | When visually inspected, any staining of the ABS area that was in contact with the test pieces shall hardly be recognized |

| | | | | |
|-------------|---|------|---|-----|
| ITEM NUMBER | 10R4-021xx | | DRAWER | MPD |
| TITLE | 24K Gold Premium Grade Stereo Audio RCA Cable | | CHECKED | MAC |
| | | | APPROVED | MAC |
| MATERIAL | SCALE | | | |
| REV. | A | UNIT | | |
| DRAWING NO: | | | 888-212-8295.com CableWholesale.com | |
| | | | | |