



REV.	DESCRIPTION	DATE
A		
B		04-2008

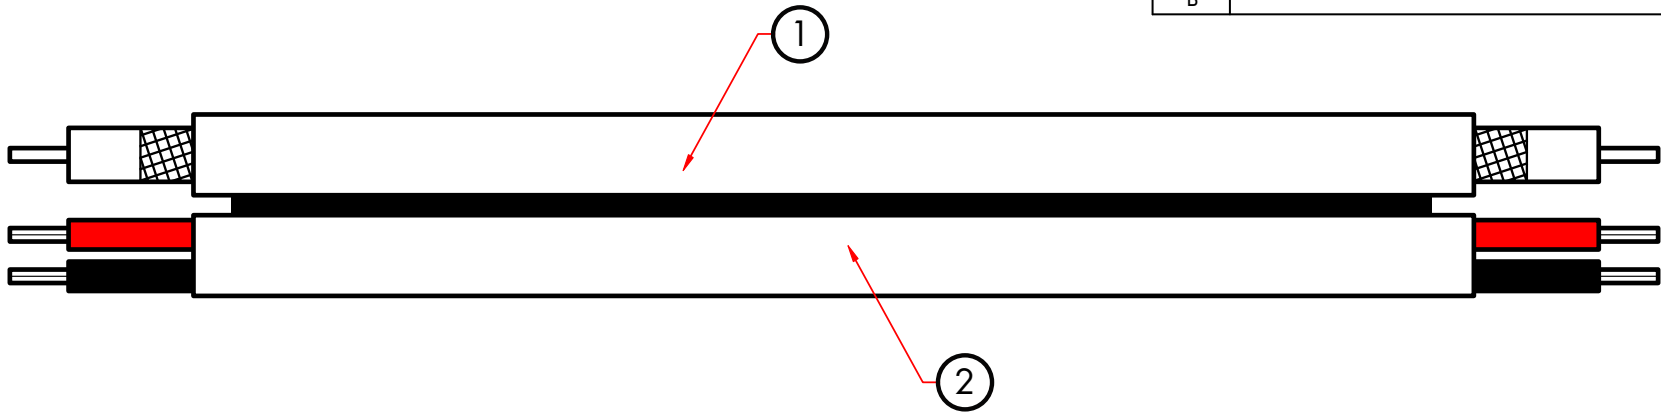


### Coax Cable Specifications:

RG59 75 Ohm Coaxial Cable  
 20AWG 0.82mm Solid Bare Copper Center Conductor  
 0.025mm AL-Mylar Foil Shield  
 16/7/0.16mm Copper Braid (95% Coverage)  
 3.66mm OD PE Dielectric  
 6.1mm OD Black PVC Jacket

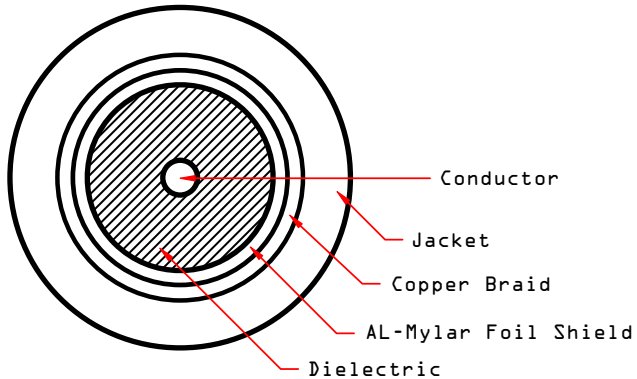

### Power Cable Specifications:

2 x 18AWG Stranded Copper Center Conductor  
 Black and Red PVC Conductor Jackets  
 Insulation OD: 2.8+/-0.2mm  
 CM, 30V, 70C

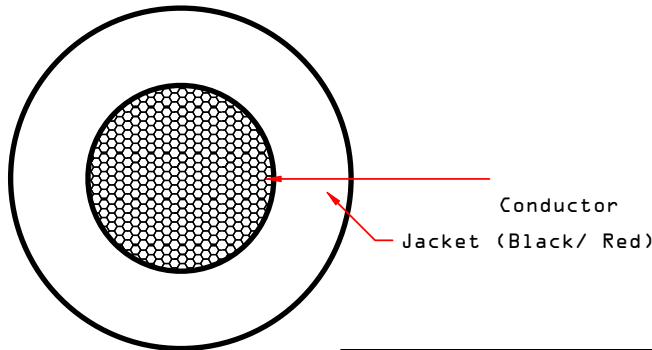

PART NO.	CABLE LENGTH
10X3-18222TF	500 ft
10X3-18222TH	1000 ft

ITEM NUMBER	10X3-18222T <sub>x</sub>	DRAWER	MPD
TITLE	RG59 Siamese Solid Coaxial Cable + 18/2 (18AWG 2C) Power, Black, Pull Box	CHECKED	MAC
MATERIAL		APPROVED	MAC
REV.	A	SCALE	
DRAWING NO:		UNIT	INCH

2	18AWG Stranded Copper Center Conductor, Insulation OD: 2.8+/-0.2mm, CM, 30V, 70C, Black and Red PVC Jackets
1	RG59 Cable, CM, 75ohm with AL-Mylar and 95% Copper Braided Shield, Black Outer PVC Jacket.
NO.	SPECIFICATIONS

	BOM LIST
--	----------

