

Product Specification


REV.	DESCRIPTION	DATE
A		
B		03-2008

Construction & Material

Part Number	Color
11K5-5291SH	White

Item	Specification	
Product	CMP/CL3P, Security, Shielded, Plenum	
Conductor	Construction	Stranded 2X18AWG(7/26AWG)
	Material	Bare Copper
Insulation	Material	Low Smoke PVC
	Min. thickness	
	Avg. thickness	0.51 mm
	Diameter	2.240 mm
	Nom. Lay Length	89 mm
Shield	Material	Black and Red
Drain Wire	Material	AL-Mylar
	Material	Stranded 20AWG(7/28AWG) Tinned Copper
Jacket	Material	Low Smoke PVC
	Min. thickness	
	Avg. thickness	0.381 mm
	Diameter	5.546 mm
Color		White
Approximate Cable Weight		30 lbs./Kft

Cross Section:

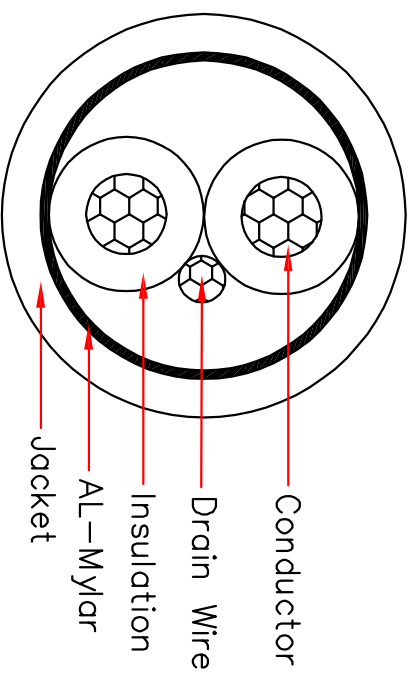

Electrical Properties:		DRAWER	LBRA
Nom. DC Resistance per Conductor@20°C	6.43 Ohms/Kft.nom.	CHECKED	
Capacitance Between Conductors@1KHz	60 pf/ft.nom.	CHECKED	
Capacitance Between Conductors to Shield@1KHz	108 pf/ft.nom.	APPROVED	
Operating Voltage	300 V/RMS max.		
Temperature Rating	-20 °C to 75 °C		
PART NUMBER:	TITLE:		
11K5-5221SH	2/18 Stranded Shielded Plenum CMP/CL3P Pullbox, 1000 ft		

