



REV.	DESCRIPTION	DATE
A		
B		12-2006

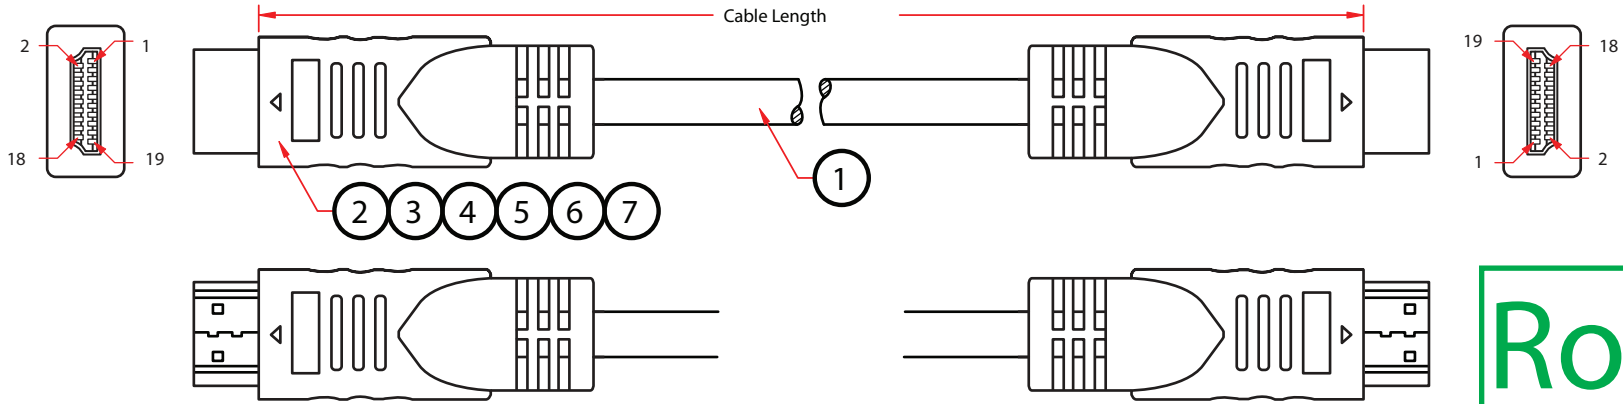

**Cable Specifications:**

24AWG 7/0.20mm Stranded Tinned Copper Conductor  
 0.025mm AL-Mylar Foil Shield  
 Copper Braid  
 1.55 mm Foam PE(1P\*4) and 1.0mm HD-PE(1P+5C) Insulation  
 24AWG 7/0.20mm Stranded Tinned Copper Drain Wire  
 10.0 mm OD PVC Jacket

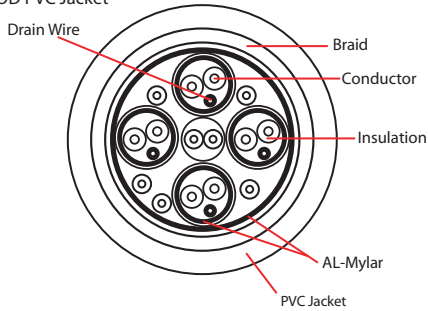

**Pin Assignment**

HDMI Male		HDMI Male		HDMI Male		HDMI Male	
1	White	1	White	10	White	10	White
2	Drain	2	Drain	11	Drain	11	Drain
3	Red	3	Red	12	Green	12	Green
4	White	4	White	13	Black	13	Black
5	Drain	5	Drain	14	White	14	White
6	Brown	6	Brown	15	Red	15	Red
7	White	7	White	16	Grey	16	Grey
8	Drain	8	Drain	17	Yellow	17	Yellow
9	Blue	9	Blue	18	Orange	18	Orange
				19	Purple	19	Purple
				Shell	Braid	Shell	Braid

Note:  
 1. 100% Open and Short Testing  
 2. Voltage: 500V DC  
 3. Dielectric: 300V AC for 3ms  
 4. Insulation Resistance: 20M ohm  
 5. Conductor Resistance: 3 ohm

PART NO.	CABLE LENGTH
HDMI-01125	25 ft
HDMI-01135	35 ft
HDMI-01150	50 ft

7	45P PVC, Color: Black
6	Inner Molding, Color: Clear
5	H.S.T. 1.0*5mm, Color: Black
4	H.S.T. 2.0*5mm, Color: Black
3	H.S.T. 0.8*3mm, Color: Black
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	CL2 Inwall Rated, UL20276 3C [(24AWG*1P + Drain) w/Al-Foil] *4 + 24AWG*1P + 24AWG*5C, w/Al-Foil + Braid, OD: 10mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	HDMI-011xx			DRAWER	MPD
TITLE	HDMI Male to HDMI Male Cable			CHECKED	MAC
MATERIAL		SCALE		APPROVED	MAC
REV.	A	UNIT	INCH		
DRAWING NO:					

