



REV.	DESCRIPTION	DATE
A		
B		12-2006

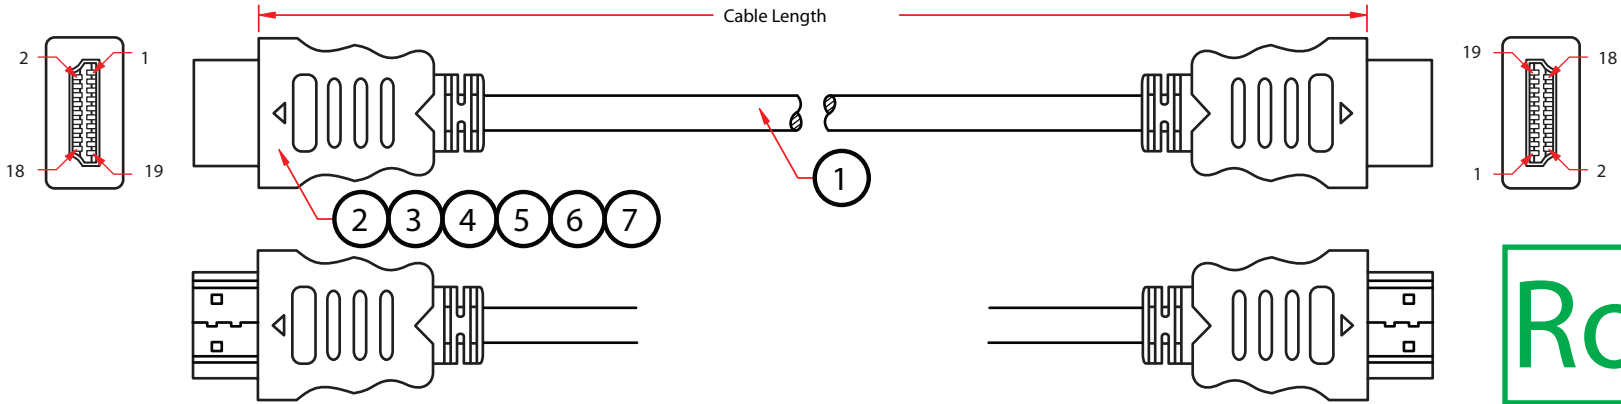

Cable Specifications:

28AWG 7/0.127mm Stranded Tinned Copper Conductor
 0.025mm AL-Mylar Foil Shield
 Copper Braid
 0.98mm Foam PE(1P*4) and 0.70mm HD-PE(1P+5C) Insulation
 28AWG 7/0.127mm Stranded Tinned Copper Drain Wire
 7.3 mm OD PVC Jacket

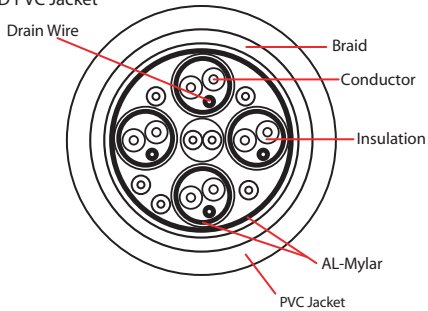

Pin Assignment


HDMI Male		HDMI Male		HDMI Male		HDMI Male	
1	White	1	White	10	White	10	White
2	Drain	2	Drain	11	Drain	11	Drain
3	Red	3	Red	12	Green	12	Green
4	White	4	White	13	Black	13	Black
5	Drain	5	Drain	14	White	14	White
6	Brown	6	Brown	15	Red	15	Red
7	White	7	White	16	Grey	16	Grey
8	Drain	8	Drain	17	Yellow	17	Yellow
9	Blue	9	Blue	18	Orange	18	Orange
				19	Purple	19	Purple
				Shell	Braid	Shell	Braid

Note:
 1. 100% Open and Short Testing
 2. Voltage: 500V DC
 3. Dielectric: 300V AC for 3ms
 4. Insulation Resistance: 20M ohm
 5. Conductor Resistance: 3 ohm

PART NO.	CABLE LENGTH
HDMI-01103	3 ft
HDMI-01106	6 ft
HDMI-01110	10 ft
HDMI-01115	15 ft

7	45P PVC, Color: Black
6	Inner Molding, Color: Clear
5	H.S.T. 1.0*5mm, Color: Black
4	H.S.T. 2.0*5mm, Color: Black
3	H.S.T. 0.8*3mm, Color: Black
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	CL2 Inwall Rated, UL20276 3C [(28AWG*1P + Drain) w/Al-Foil] *4 + 28AWG*1P + 28AWG*5C, w/Al-Foil + Braid, OD: 7.3mm, Black PVC Jacket
NO.	SPECIFICATIONS

ITEM NUMBER	HDMI-011xx			DRAWER	MPD
TITLE	HDMI Male to HDMI Male Cable			CHECKED	MAC
				APPROVED	MAC
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:					



BOM LIST