



REV.	DESCRIPTION	DATE
A		
B		03-2009

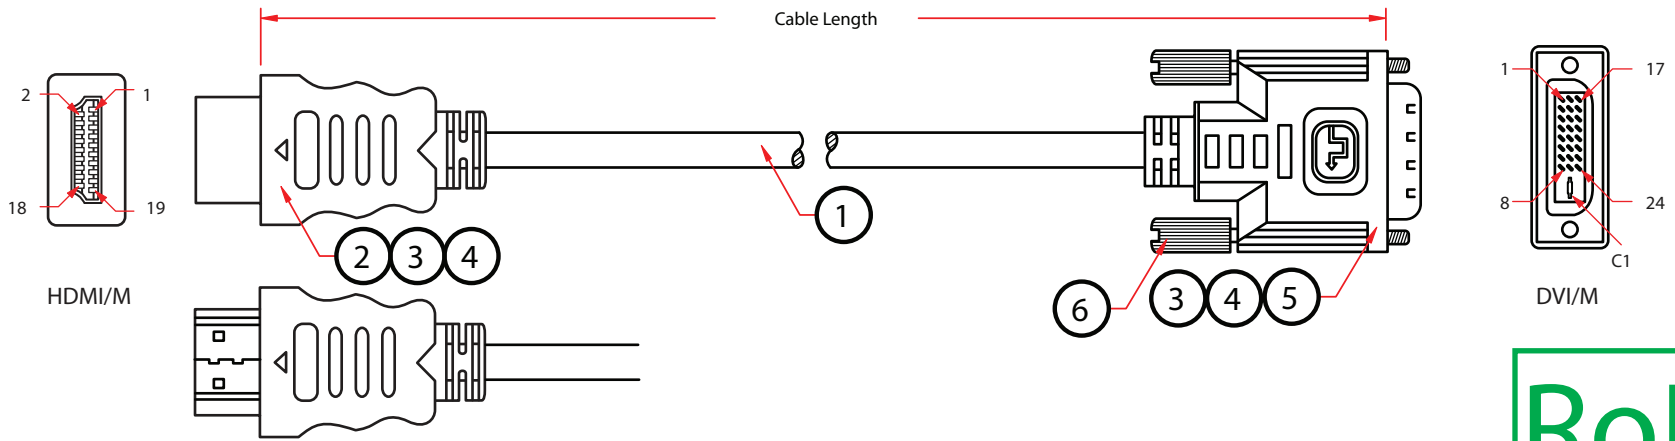

Note:  
 1. 100% Open and Short Testing  
 2. Voltage: 500V DC  
 3. Dielectric: 300V AC for 3ms  
 4. Insulation Resistance: 20M ohm  
 5. Conductor Resistance: 3 ohm

**Cable Specifications:**

- 24AWG 7/0.20mm Stranded Tinned Copper Conductor
- 0.025mm AL-Mylar Foil Shield
- Copper Braid
- 1.55mm Foam PE(1P\*4) and 1.0mm HD-PE(1P+5C) Insulation
- 24AWG 7/0.20mm Stranded Tinned Copper Drain Wire
- 10.0 mm OD PVC Jacket

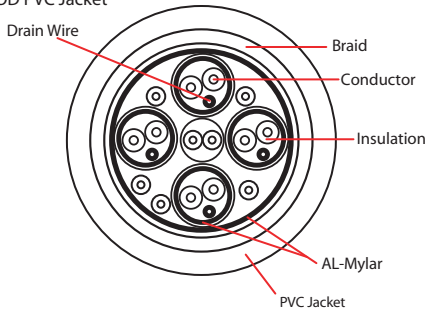

**Pin Assignment**

HDMI Male	DVI-D Male	HDMI Male	DVI-D Male
1 White	2	10 White	23
2 Drain	3	11 Drain	22
3 Red	1	12 Green	24
4 White	10	15 Grey	6
5 Drain	11	16 White	7
6 Brown	9	17 Yellow	15
7 White	18	18 Orange	14
8 Drain	19	19 Purple	16
9 Blue	17	Shell Braid	Shell

PART NO.	CABLE LENGTH
HDMI-21525	25 ft
HDMI-21535	35 ft
HDMI-21550	50 ft

7	
6	4/40 Molded Thumbscrew, Black Color
5	DVI 25 Pin Male W/Gold Plating Contacts
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	CL2 Inwall Rated, UL20276 3C [(24AWG*1P + Drain) w/Al-Foil] *4 + 24AWG*1P + 24AWG*5C, w/Al-Foil + Braid, OD: 10.0mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	HDMI-215xx			DRAWER	LIBRA
TITLE	HDMI to DVI cable CL2 rated In-wall			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:					

