



REV.	DESCRIPTION	DATE
A		
B		03-2009

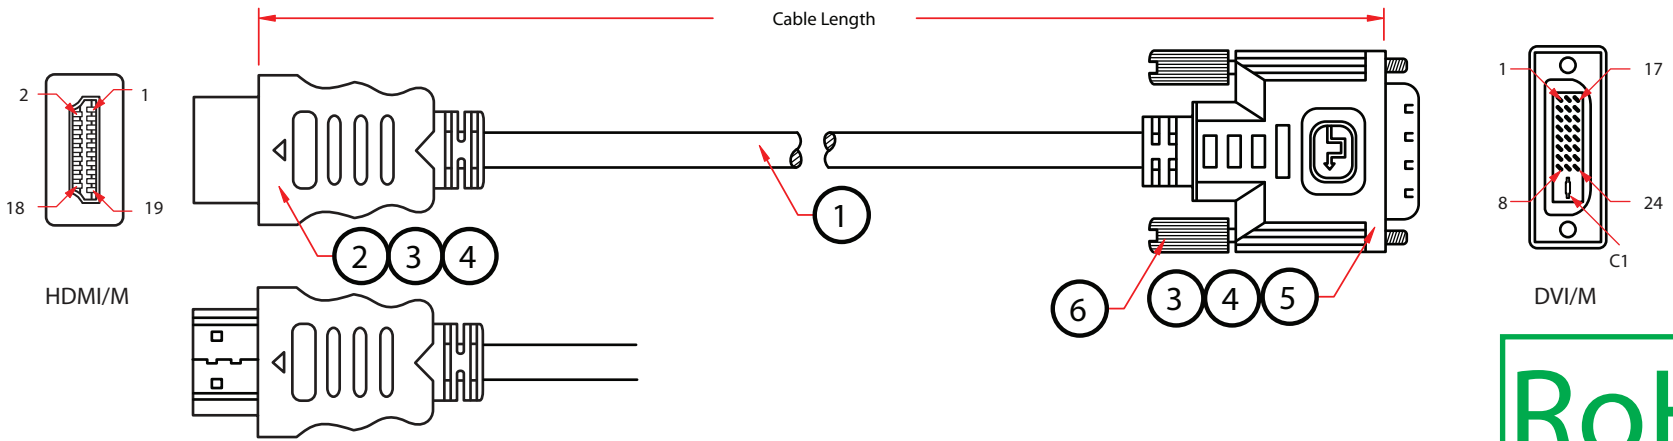

Note:
 1. 100% Open and Short Testing
 2. Voltage: 500V DC
 3. Dielectric: 300V AC for 3ms
 4. Insulation Resistance: 20M ohm
 5. Conductor Resistance: 3 ohm

Cable Specifications:

28AWG 7/0.127mm Stranded Tinned Copper Conductor
 0.025mm AL-Mylar Foil Shield
 Copper Braid
 0.98mm Foam PE(1P*4) and 0.70mm HD-PE(1P+5C) Insulation
 28AWG 7/0.127mm Stranded Tinned Copper Drain Wire
 7.5 mm OD PVC Jacket

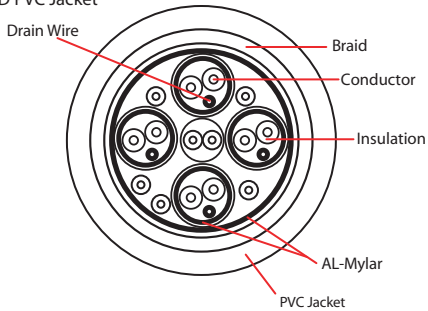

Pin Assignment

HDMI Male	DVI-D Male	HDMI Male	DVI-D Male
1 White	2 Drain	10 White	23 Drain
2 Drain	3 Red	11 Green	22 Green
3 Red	1 White	12 Grey	24 Grey
4 White	10 Drain	15 White	6 White
5 Drain	11 Brown	16 Yellow	7 Yellow
6 Brown	9 White	17 Orange	15 Orange
7 White	18 Drain	18 Purple	14 Purple
8 Drain	19 Blue	19 Shell	16 Shell
9 Blue	17 Shell		Shell

PART NO.	CABLE LENGTH
HDMI-21503	3 ft
HDMI-21506	6 ft
HDMI-21510	10 ft
HDMI-21515	15 ft

7	
6	4/40 Molded Thumbscrew, Black Color
5	DVI 25 Pin Male W/Gold Plating Contacts
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	CL2 Inwall Rated, UL20276 3C [(28AWG*1P + Drain) w/Al-Foil] *4 + 28AWG*1P + 28AWG*5C, w/Al-Foil + Braid, OD: 7.5mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	HDMI-215xx			DRAWER	LIBRA
TITLE	HDMI to DVI cable CL2 rated In-wall			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:					

