



REV.	DESCRIPTION	DATE
A		
B		03-2009

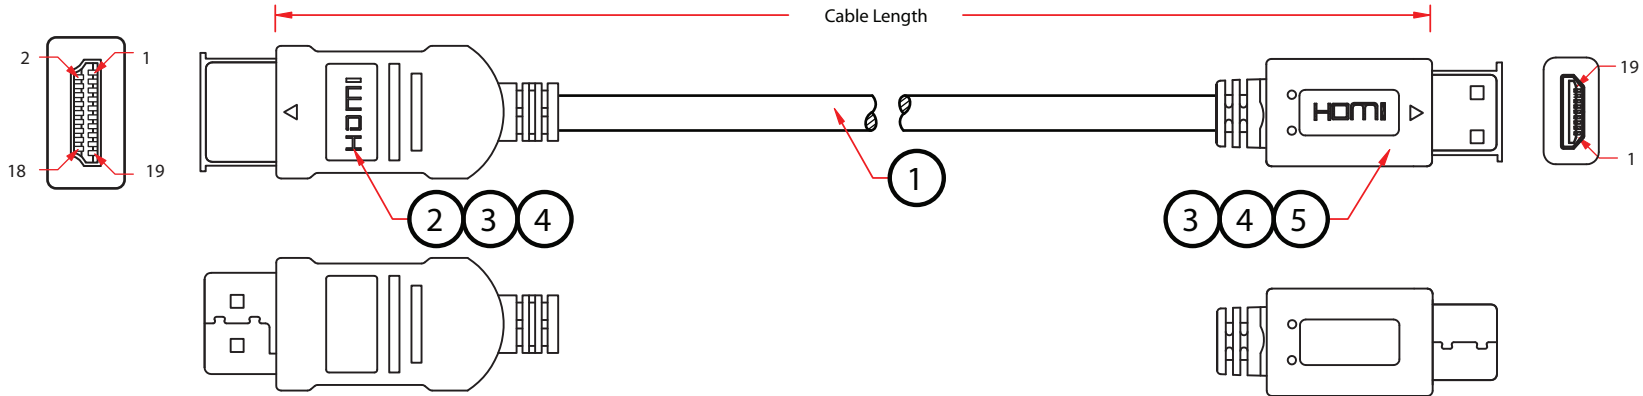

Cable Specifications:

30AWG 7/0.10mm Stranded Tinned Copper Conductor
 0.025mm AL-Mylar Foil Shield
 Copper Braid
 0.58mm Foam PE(1P*4) and 0.50mm HD-PE(1P+5C) Insulation
 30AWG 7/0.10mm Stranded Tinned Copper Drain Wire
 5.5 mm OD PVC Jacket

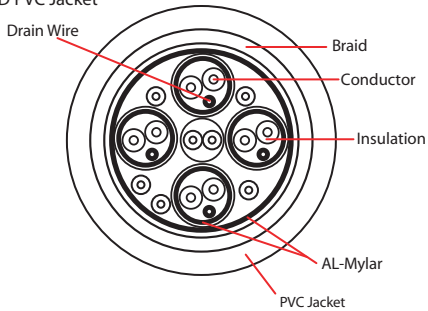

Pin Assignment

HDMI Male		HDMI Male		HDMI Male		HDMI Male
1	White	1	White	10	White	10
2	Drain	2	Drain	11	Green	11
3	Red	3	Red	12	Black	12
4	White	4	White	13	White	13
5	Drain	5	Drain	14	Red	14
6	Brown	6	Brown	15	Grey	15
7	White	7	White	16	Yellow	16
8	Drain	8	Drain	17	Orange	17
9	Blue	9	Blue	18	Purple	18
				19	Braid	19
				Shell		Shell



PART NO.	CABLE LENGTH
HDMI-31103	3 ft
HDMI-31106	6 ft
HDMI-31110	10 ft
HDMI-31115	15 ft

7	
6	
5	Mini HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	UL20276 3C [(30AWG*1P + Drain) w/Al-Foil] *4 + 30AWG*1P + 30AWG*5C, w/Al-Foil + Braid, OD: 5.5mm, Black PVC Jacket
NO.	SPECIFICATIONS

ITEM NUMBER	HDMI-311xx			DRAWER	LIBRA
TITLE	HDMI Male to Mini HDMI Male Cable			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:					

	BOM LIST
--	----------

