



REV.	DESCRIPTION	DATE
A		
B		01-2010

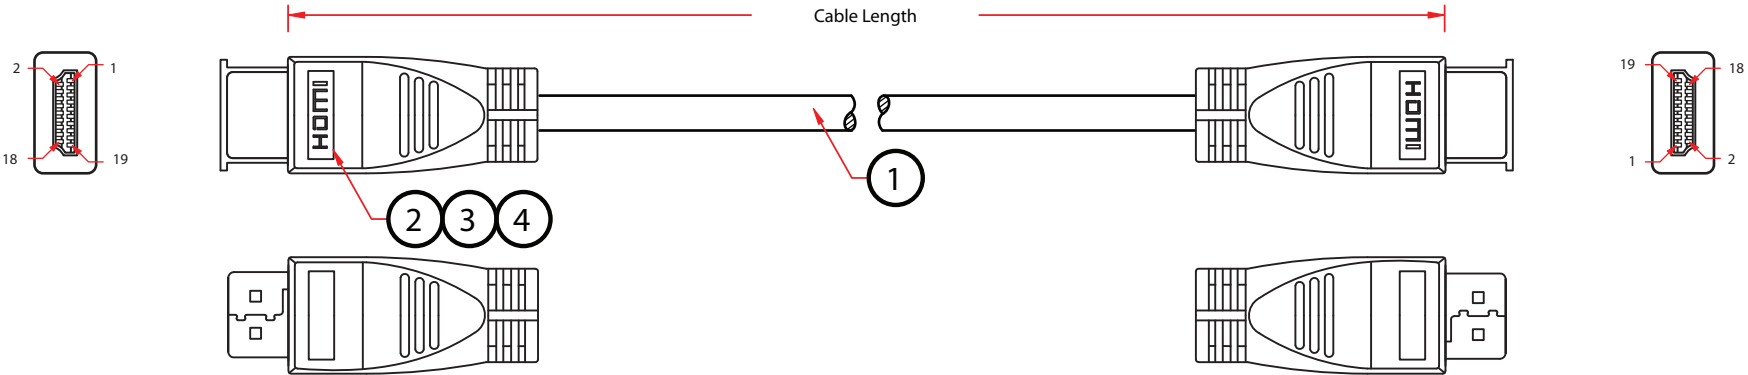

Cable Specifications:

24AWG 7/0.20mm Stranded Tinned Copper
 0.025mm AL-Mylar Foil Shield
 Tinned Copper Braid 16/10/0.10mm, 65% Coverage
 1.6mm Foam PE(1P*4) and 1.0mm HD-PE(1P+2C) Insulation
 10.0 mm OD PVC Jacket

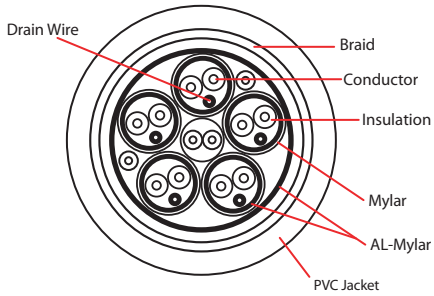

Pin Assignment

HDMI Male		HDMI Male		HDMI Male		HDMI Male
1	White	1	White	10	Drain	10
2	Drain	2	Red	11	Green	11
3	Red	3	White	12	Yellow	12
4	White	4	Drain	13	White	13
5	Drain	5	Brown	14	Drain	14
6	Brown	6	White	17	Black	17
7	White	7	Drain	19	Red	19
8	Drain	8	Blue	15	Green	15
9	Blue	9	Shell	16	Purple	16
				18	Braid	18
				Shell		Shell



PART NO.	CABLE LENGTH
HDMI-41125	25 ft
HDMI-41135	35 ft
HDMI-41150	50 ft
HDMI-411HD	100 ft

5	
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	CL2 Inwall Rated, UL20276 [(24AWG*1P + Drain) w/Al-Foil] *5 +24AWG*1P +24AWG*2C, w/Al-Foil + Braid, OD: 10.0mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	HDMI-411xx			DRAWER	LIBRA
TITLE	HDMI Male to HDMI Male Cable, 1.4 Version, TC-Braid,Black, CL2-rated			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	A	UNIT	INCH		
DRAWING NO:					

