


REV.	DESCRIPTION	DATE
A		
B		02-2006

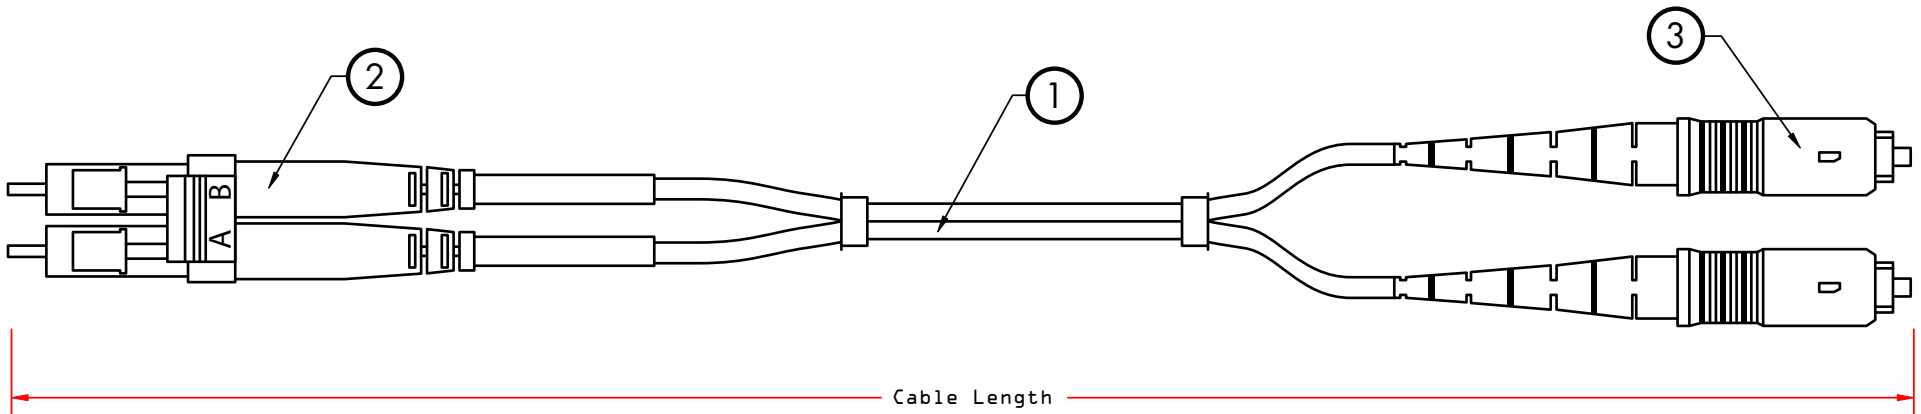

Operating Temp	-20C - 70C
Storage Temp	-40C - 70C
Insertion Loss	0.3dB
Return Loss	50dB
Length Tolerances < 5M	0 - 25cm
Length Tolerances > 5M	0 - 40cm
Repeatability	< 0.2dB
Exchangeability	< 0.2dB

PART NO.	CABLE LENGTH
LCSC-11001	1 M
LCSC-11002	2 M
LCSC-11003	3 M
LCSC-11004	4 M
LCSC-11005	5 M
LCSC-11007	7 M
LCSC-11010	10 M

ITEM NUMBER	LCSC-110xx		DRAWER	MPD
TITLE	LC to SC Multi-mode, Duplex, 50/125, Fiber Optic Cable		CHECKED	MAC
MATERIAL	SCALE		APPROVED	MAC
REV.	A	UNIT	INCH	
DRAWING NO:			 888-212-8295.com	

3	SC Connector
2	LC Connector
1	1.8mm, Multi-mode, Duplex, 50/125 Fiber Cable
NO.	SPECIFICATIONS
	BOM LIST