





REV.	DESCRIPTION	DATE
A		
B		02-2006

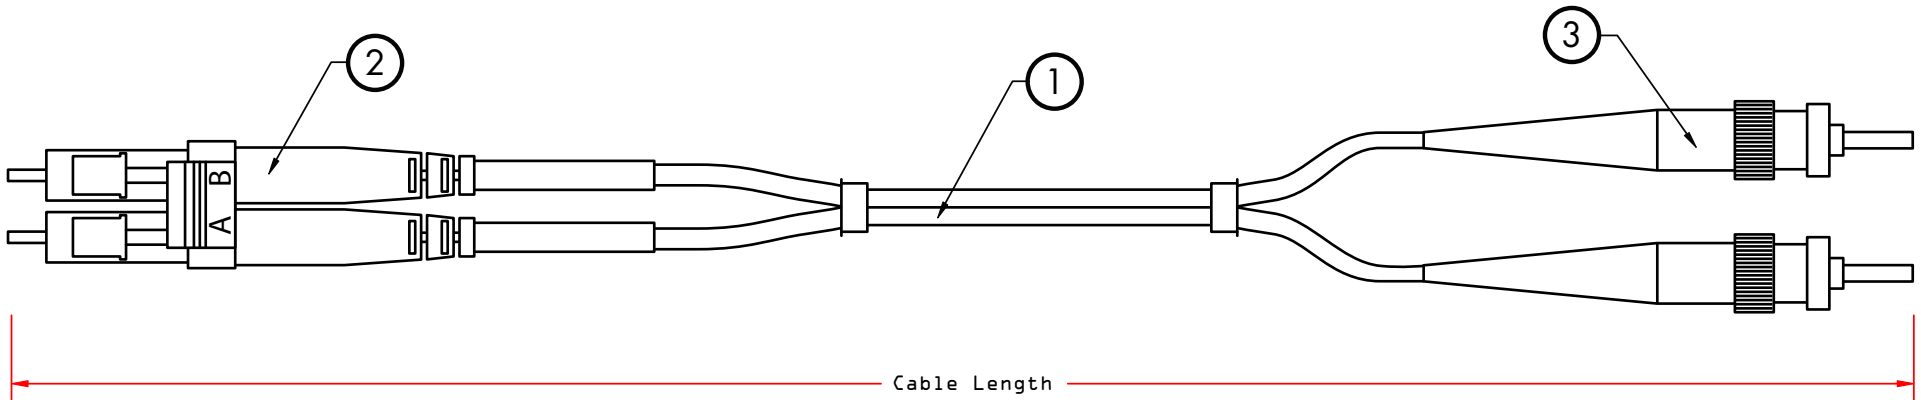

Operating Temp	-20C - 70C
Storage Temp	-40C - 70C
Insertion Loss	0.3dB
Return Loss	50dB
Length Tolerances < 5M	0 - 25cm
Length Tolerances > 5M	0 - 40cm
Repeatability	< 0.2dB
Exchangeability	< 0.2dB

PART NO.	CABLE LENGTH
LCST-11001	1 M
LCST-11002	2 M
LCST-11003	3 M
LCST-11004	4 M
LCST-11005	5 M
LCST-11007	7 M
LCST-11010	10 M

ITEM NUMBER	LCST-110xx		DRAWER	MPD
TITLE	LC to ST Multi-mode, Duplex, 50/125, Fiber Optic Cable		CHECKED	MAC
			APPROVED	MAC
MATERIAL		SCALE	 	
REV.	A	UNIT		INCH
DRAWING NO:				

3	ST Connector
2	LC Connector
1	1.8mm, Multi-mode, Duplex, 50/125 Fiber Cable
NO.	SPECIFICATIONS
	BOM LIST