


REV.	DESCRIPTION	DATE
A		
B		02-2006

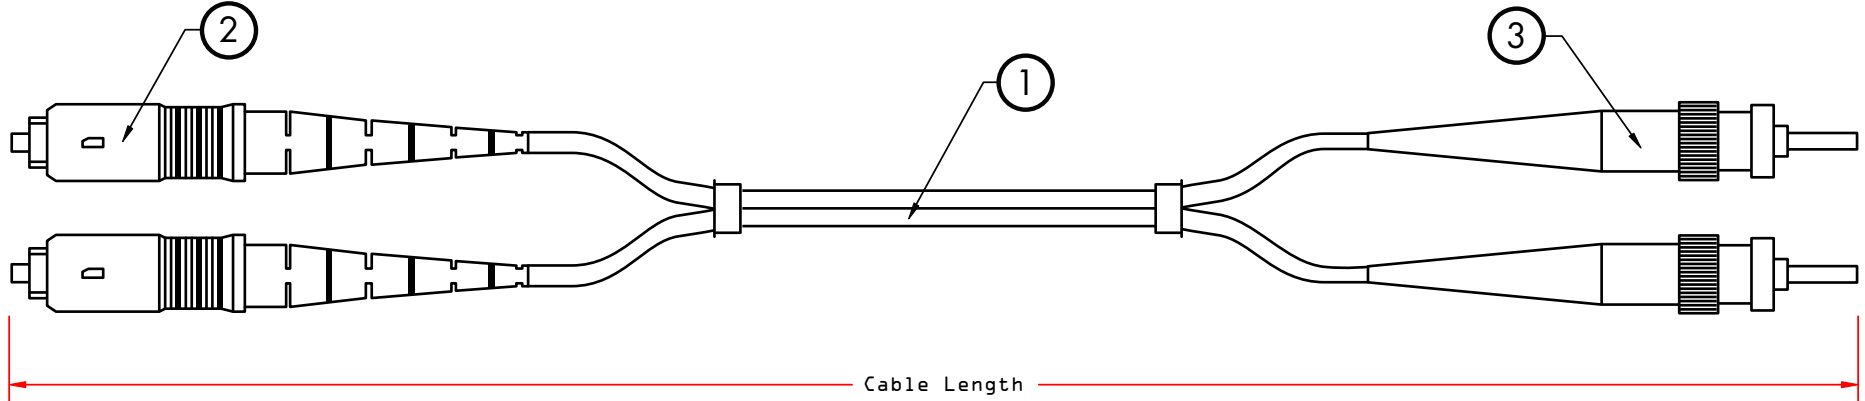

Operating Temp	-20C - 70C
Storage Temp	-40C - 70C
Insertion Loss	0.3dB
Return Loss	50dB
Length Tolerances < 5M	0 - 25cm
Length Tolerances > 5M	0 - 40cm
Repeatability	< 0.2dB
Exchangeability	< 0.2dB

PART NO.	CABLE LENGTH
SCST-11001	1 M
SCST-11002	2 M
SCST-11003	3 M
SCST-11004	4 M
SCST-11005	5 M
SCST-11007	7 M
SCST-11010	10 M

ITEM NUMBER	SCST-110xx		DRAWER	MPD
TITLE	SC to ST Multi-mode, Duplex, 50/125, Fiber Optic Cable		CHECKED	MAC
			APPROVED	MAC
MATERIAL		SCALE		
REV.	A	UNIT		INCH
DRAWING NO:				

3	ST Connector
2	SC Connector
1	2.8mm, Multi-mode, Duplex, 50/125 Fiber Cable
NO.	SPECIFICATIONS
BOM LIST	