

# Product Specification


REV.	DESCRIPTION	DATE
A		
B		03-2008

## Construction & Material

Part Number	Color
10K4-0221CF	Gray
10K4-0232CF	Brown
10K4-0261CF	Blue
10K4-0281CF	Yellow
10K4-0291CF	White

Item	Specification	
Product	CM/CL3, Security	
Conductor	Construction	Solid 2x22AWG
	Material	Bare Copper
Insulation	Material	PVC
	Min. thickness	
	Avg. thickness	0.254 mm
	Diameter	1.143 mm
	Norm. Lay Length	Parallel
Jacket	Color	Black and Red
	Material	PVC
	Min. thickness	
	Avg. thickness	0.381 mm
	Diameter	3.175 mm
Approximate Cable Weight	Gray, Brown, Blue, Yellow and White 9 lbs./Kft	

Cross Section: \_\_\_\_\_

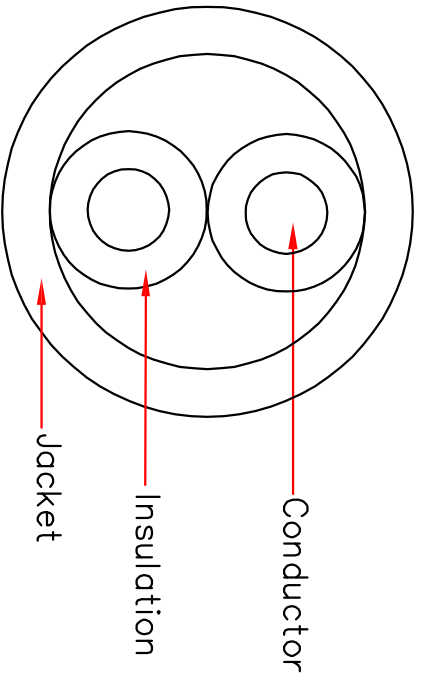

Electrical Properties:		DRAWER	LIBRA
Nom. DC Resistance per Conductor@20°C	16.19 Ohms/Kft.nom.	CHECKED	
Capacitance Between Conductors@1KHz	30 pF/ft.nom.	APPROVED	
Operating Voltage	300 V/RMS max.		
Temperature Rating	-20 °C to 60 °C		
PART NUMBER:	TITLE:		
10K4-02xxCF	2/22 Solid CM/CL3 Speed Bag, 500 ft		

