


Product Specifications

REV.	DESCRIPTION	DATE
A		
B		02-2006

Construction & Material :

Item		Unit	Specification
Product			CAT-6 UTP 4P
Conductor	Size	AWG	24
	Number	Pairs	1
	Material		Solid Bare Copper
	Construction	pcs / mm	7/0.59
	Diameter	mm	0.60
Insulation	Material		HD-PE
	Min.thickness	mm	0.184
	Avg.thickness	mm	0.207
	Diameter	mm	1.05
	Color		Blue-White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Twisting	Construction		See Cross Section
Cabling	Construction		See Cross Section
Jacket	Material		PVC
	Min.thickness	mm	0.45
	Avg.thickness		0.55
	Overall Diameter	mm	6.20 ± 0.20
	Color		By Order
Black Marking	TYPE CM 24AWG 60 (UL) E188630 CSA LL81295 CMG, ETL VERIFIED TIA/EIA-568-B. CAT-6 UTP Patch Cable UTP		

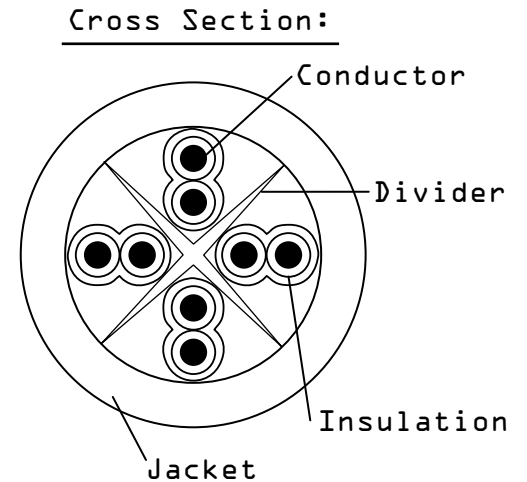

DRAWER	MPD
CHECKED	MAC
APPROVED	MAC

COLORS:	PART NUMBER:	TITLE:
Gray, Black, Orange, Purple, Green, Blue, Red, Pink, Yellow, White	10X8-0xxTH	CAT-6 UTP, 24AWG, Solid

C
888-212-8295.com
CableWholesale.com

Electrical Property :

REV.	DESCRIPTION	DATE
A		
B		02-2006

Item		Unit	Specification			Standard		
D-C Resistance		Ω/100M	AT 20			DC Max.9.3Ω		
D-C Resistance Unbalance		%	-----			Max.5		
Capacitance Unbalance		pF/100M	-----			Max.330		
Characteristic Impedance 1.0-100.0MHz		Ω/100M	-----			100 ± 15		
Dielectric Withstand		VAC/1MIN	700			No Breakdown		
Frequency MHz	Attenuation dB/100m	NEXT Pair-Pair (dB)	NEXT Power Sum (dB)	ELFEXT Pair-Pair (dB)	ELFEXT Power Sum (dB)	Return Loss (dB)	Propagation Delay ns/100m	
1	2.4	74.3	72.3	67.8	64.8	20.0	570.00	
10	7.8	59.3	57.3	47.8	44.8	25.0	545.4	
31.25	9.9	51.9	49.9	37.9	34.9	23.7	540.4	
62.5	11.1	47.4	45.4	31.9	28.8	21.6	538.6	
100	12.5	44.3	42.3	27.8	24.8	20.2	537.6	
155	14.1	41.5	39.5	23.9	20.9	18.8	536.9	
200	20.4	39.8	37.8	21.7	18.7	18.0	536.5	
250	26.4	38.3	36.3	19.8	16.8	17.4	536.3	

DRAWER	MPD
CHECKED	MAC
APPROVED	MAC
