
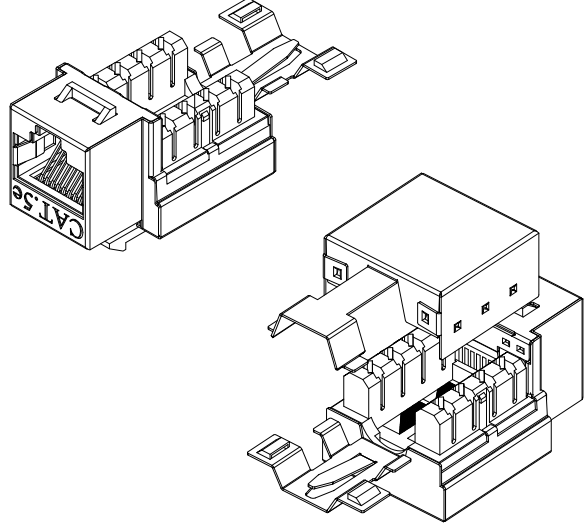


RoHS

REV.	DESCRIPTION	DATE
A		03-2013

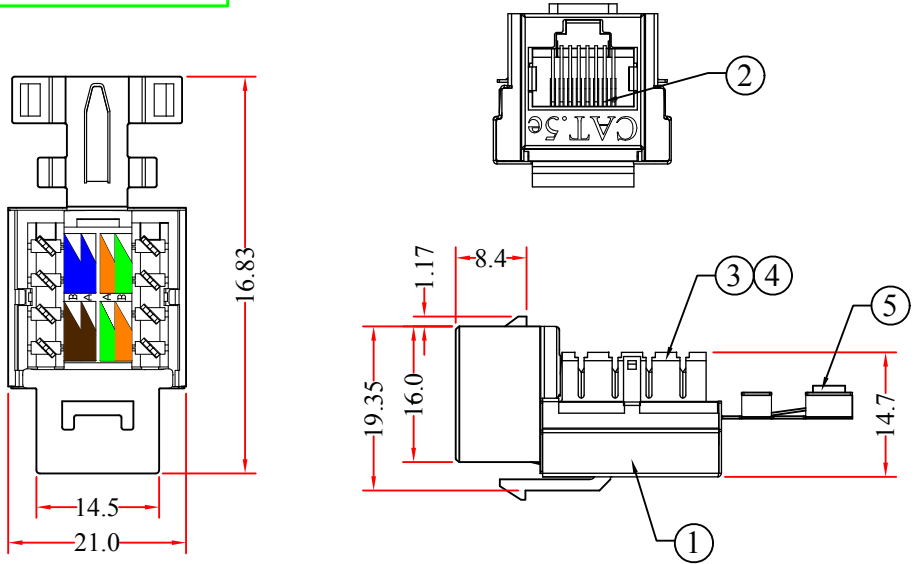

Color Coding Information	
T568B:	T568A:
1 — White/Orange	1 — White/Green
2 — Orange	2 — Green
3 — White/Green	3 — White/Orange
4 — Blue	4 — Blue
5 — White/Blue	5 — White/Blue
6 — Green	6 — Orange
7 — White/Brown	7 — White/Brown
8 — Brown	8 — Brown

- Notes:**
- 3-Piece Shielded Cover Designed For Easy Cable Installation And Protection From External Radiated Noise
 - Certifications: UL Listed, ANSI / TIA / EIA-568-B.2 ,FCC
 - Tool: Krone, AT&T(110Type)

5	Shielded Cover
4	PCB: FR4 1.6m/m thickness, 2 Layers
3	IDC Housing: PC UL 94V-0 White Color
2	Contact Finished: 50 micro-inch Gold Over,Nickel 50-60 micro-inch
1	Housing, PC UL94V-0 Rated
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	310-520		DRAWER	JL
TITLE	Shielded Cat5e Keystone Jack, RJ45 Female to 110 Punch Down, STP		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	MM	
DRAWING NO:				
			 888-212-8295	